

BROCADE DCX BACKBONE FAMILY

DATA CENTER

HIGHLIGHTS

- Provides a highly robust 8Gb platform in two modular form factors for enterprise data centers supporting open system and System z environments
- Delivers over four times the performance of competitive offerings to meet data growth and access demands, expand virtualization, and consolidate resources
- Delivers ten times the energy efficiency of competitive offerings, enabling data centers to support more server and storage equipment
- Provides a high-density, multiprotocol platform for consolidating server connectivity using emerging FCoE and CEE technology options
- Offers fabric-based applications, including secure data encryption and Adaptive Networking that helps optimize fabric behavior and maximize service levels
- Enables logical partitioning of platforms and fabrics into virtual data and management domains without sacrificing performance, scalability, security, or reliability
- Extends ROI by operating natively with Brocade B-Series and M-Series fabrics, and with common management tools

A Platform for Evolving Data Center Fabrics

Brocade® DCX® Backbones are highly robust network switching platforms that combine breakthrough performance, scalability, and energy efficiency with long-term investment protection. Supporting open systems and System z environments, Brocade DCX Backbones are designed to address the data growth and application demands of evolving enterprise data centers; enable server, SAN, and data center consolidation; and reduce infrastructure and administrative costs.


CHOICE AT THE CORE AND AT THE EDGE

Brocade DCX Backbones are available in two modular form factors. Built for large enterprise networks, the 14U Brocade DCX has eight vertical blade slots to provide up to 384 Fibre Channel ports using Brocade-branded 4Gb or 8Gb SFPs. Built for midsize networks, the 8U Brocade DCX-4S has four horizontal blade slots to provide up to 192 Fibre Channel ports.

Both models feature ultra-high-speed Inter-Chassis Link (ICL) ports to connect up to three backbones, providing extensive scalability and flexibility at the network core. At the network edge, organizations can utilize Brocade 8Gb switches, Brocade 48000 Directors, or—for complete backbone-class capabilities—the Brocade DCX-4S.

HIGHEST PERFORMANCE AND SCALABILITY

Both Brocade DCX models provide 256 Gbit/sec of bandwidth per slot (512 Gbit/sec aggregate data rate). When combined with unique Brocade local switching capabilities—data traffic within the same port group does not consume

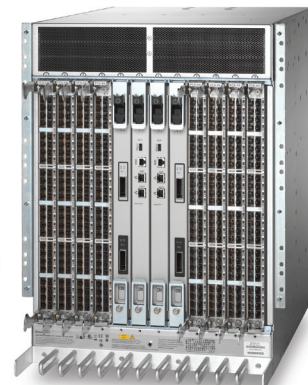

BROCADE

slot bandwidth—the Brocade DCX family provides over *four times* the performance of competitive offerings. Performance capabilities include:

- Brocade DCX:
 - 384 ports operating simultaneously at full 8Gb speed
 - 3 Tbit/sec of chassis bandwidth
 - 512 Gbit/sec of ICL bandwidth (freeing up to 64 8Gb ports per chassis for server, storage, and fabric connections)
- Brocade DCX-4S:
 - 192 ports operating simultaneously at full 8Gb speed
 - 1.5 Tbit/sec of chassis bandwidth
 - 256 Gbit/sec of ICL bandwidth (freeing up to 32 8Gb ports per chassis)

FLEXIBLE, MULTIPROTOCOL ARCHITECTURE


Brocade DCX Backbones include a Virtual Fabrics feature that enables partitioning of a physical SAN into logical fabrics and isolation by application, business group, customer, or traffic type. Optional Fibre Channel Integrated Routing alleviates the need for special-purpose blades or routers to connect servers and storage in separate fabrics. And optional SAN extension over long-distance IP connections accelerates offsite replication, backup, and restore.

The Brocade DCX family supports 1/2/4/8/10Gb Fibre Channel and FICON®, FCIP, and IPFC. To consolidate server connectivity using emerging Fibre Channel over Ethernet (FCoE) and Converged Enhanced Ethernet (CEE) in open systems environments, the Brocade FCOE10-24 Blade enables a high-density, end-of-row chassis configuration. Alternatively, Brocade 8000 top-of-rack switches can be connected over Fibre Channel Inter-Switch Links (ISLs) to Brocade DCX Backbones in the network core.

PLUG-IN FABRIC-BASED APPLICATIONS

Brocade FS8-18 Encryption Blades can encrypt data-at-rest at up to 96 Gbit/sec per blade with highly secure 256-bit AES and integrated support for leading key management applications. The Brocade FA4-18 Application Blade delivers continuous data protection without impacting server resources through tight third-party application integration. Transparent Frame Redirection enables implementation of fabric-based applications using current zoning practices and across heterogeneous environments.

Figure 1. Brocade DCX Backbones provide the core platform of the Brocade Data Center Fabric (DCF) architecture.

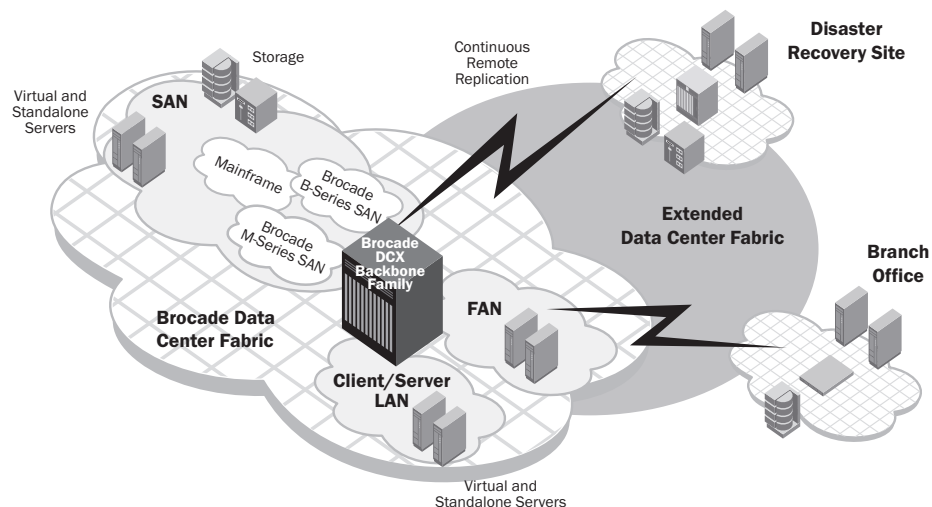

INTELLIGENT MANAGEMENT

To help maximize network performance and reduce operational expense, Brocade Data Center Fabric Manager (DCFM™) provides intuitive system configuration, comprehensive management, and a topology-centric view across Brocade data center solutions. Brocade DCFM Enterprise supports both backbone models, while Brocade DCFM Professional (bundled) and Brocade DCFM Professional Plus support the Brocade DCX-4S.

BROCADE FOS-POWERED WITH TRAFFIC MONITORING AND ADAPTIVE NETWORKING

Brocade DCX Backbones utilize the powerful Brocade Fabric OS® (FOS), which provides several unique features, including Bottleneck Detection; Top Talkers (part of Advanced Performance Monitoring); and Adaptive Networking, a suite of tools that includes Ingress Rate Limiting, Traffic Isolation, and QoS. Managed through DCFM or the command line interface, these advanced capabilities help optimize fabric behavior and application performance.

Bottleneck Detection identifies and alerts administrators to “slow drain” storage devices causing latency and I/O timeouts, particularly in highly virtualized server environments. Top Talkers measures the top bandwidth-consuming traffic (including by individual virtual machine) in real time over a physical device connection or throughout a network switch. Ingress Rate Limiting restricts data flow from less-critical hosts at preset bandwidths. Traffic Isolation

dedicates paths in the fabric to specific data flows, enabling predictability and avoiding network congestion. And QoS expedites critical traffic in the event of congestion while keeping all traffic flowing.

ENERGY EFFICIENCY, RELIABILITY, AND INVESTMENT PROTECTION

Brocade DCX Backbones are highly efficient at reducing power consumption, cooling, and carbon footprint in data centers. While providing unmatched performance and scale, Brocade DCX Backbones use less than one-half watt per Gbit/sec—making them *10 times* more efficient than competitive offerings.

To help minimize downtime costs, the Brocade DCX Backbone family builds upon years of innovation and leverages the core technology of Brocade systems performing at greater than 99.999 percent uptime in the world’s most demanding data centers. To maximize return on existing investments, Brocade DCX Backbones connect natively to Brocade B- and M-Series fabrics without disruption.

COMPLETE, BEST-IN-CLASS SOLUTIONS

Through longstanding partner relationships and extensive compatibility testing, Brocade provides organizations with broad choice to implement best-in-class solutions. Moreover, Brocade and its partners offer complete solutions that include cable management, education, support, and services. For more information, contact a Brocade sales partner or visit www.brocade.com.

BROCADE DCX BACKBONE SPECIFICATIONS

Systems Architecture			
Chassis	<p>Single chassis: Up to 384 (Brocade DCX) or 192 (Brocade DCX-4S) 8Gb universal (E, F, FL, M, EX) Fibre Channel ports using up to eight 16-, 32-, or 48-port Fibre Channel blades</p> <p>Dual-chassis: Up to 768 (Brocade DCX) or 384 (Brocade DCX-4S) 8Gb universal Fibre Channel ports; ICL ports (four per chassis, copper pin) connect up to three Brocade DCX or Brocade DCX-4S chassis (same models or a mix)</p>	Switch latency	Locally switched ports 700 ns; blade-to-blade latency is 2.1 µsec
Control processor	Redundant (active/standby) control processor modules	Maximum frame size	2112-byte payload
Scalability	Full-fabric architecture of 239 switches	Frame buffers	2048 per 16-port group on 16/32-port blades and up to 2048 per 24-port group on 48-port blades, dynamically allocated
Certified maximum	6000 active nodes; 56 switches, 19 hops in Brocade FOS fabrics; 31 switches, 3 hops in Brocade M-EOS fabrics; larger fabrics certified as required	Classes of service	Class 2, Class 3, Class F (inter-switch frames)
Special-purpose blades	<p>FC10-6 Blade provides six 10Gb Fibre Channel ports (up to eight blades)</p> <p>FX8-24 Blade provides SAN extension over IP networks (12 8Gb Fibre Channel ports with license options providing up to ten 1 GbE ports and up to two 10 GbE ports per blade; up to two blades)</p> <p>FA4-18 Application Blade is integrated with EMC RecoverPoint to provide continuous data protection (16 4Gb Fibre Channel ports and two Gigabit Ethernet ports per blade; up to four blades)</p> <p>FS8-18 Encryption Blade provides plug-in encryption of data on disk or tape, supporting industry-standard AES-256 and DataFort-compatible encryption mode (16 8Gb Fibre Channel ports; up to four blades; requires DCFM management)</p> <p>FCOE10-24 Blade provides CEE/FCoE connectivity for server I/O consolidation (24 10 GbE CEE ports; up to two blades)</p>	Fibre Channel port types	FL_Port (except FC8-48), F_Port, M_Port (Mirror Port), E_Port, EX_Port (Fibre Channel Integrated Routing); self-discovery based on switch type (U_Port); optional port type control
Performance	<p>Fibre Channel: 1.063 Gbit/sec line speed, full duplex; 2.125 Gbit/sec line speed, full duplex; 4.25 Gbit/sec line speed, full duplex; 8.50 Gbit/sec line speed, full duplex; auto sensing of 1, 2, 4, and 8Gb port speeds; optionally programmable 1, 2, 4, and 8Gb ports; 10.5 Gbit/sec line speed, full duplex.</p> <p>CEE: 10.0 Gbit/sec line speed, full duplex.</p>	Data traffic types	Fabric switches supporting unicast, multicast (255 groups), and broadcast
ISL Trunking	<p>Frame-based trunking with up to eight 8Gb ports per ISL trunk; up to 64 Gbit/sec per ISL trunk</p> <p>Exchange-based load balancing across ISLs with DPS included in Fabric OS</p>	Media types	<p>4Gb: FC8-16, -32, and -48; FR4-18i; FA4-18; and FS8-18 blades require Brocade hot-pluggable, Small Form-factor Pluggable (SFP), LC connector; 4Gb Short-Wavelength Laser (SWL); 4Gb Long-Wavelength Laser (LWL); 4Gb Extended Long-Wavelength Laser (ELWL)</p> <p>8Gb: FC8-16, -32, and -48; FX8-24; and FS8-18 blades require Brocade hot-pluggable SFP+, LC connector; 8Gb SWL; 8Gb LWL</p> <p>10Gb: FC10-6 blades utilize non-Brocade hot-pluggable, 10Gb Small Form Factor Pluggable (XFP), LC connector; 10Gb SWL; 10Gb LWL</p> <p>Fibre Channel distance subject to fiber-optic cable and port speed</p> <p>CEE media type: Hot-pluggable, Brocade 10 GbE SFP+ supports any combination of Short-Reach (SR) and Long-Reach (LR) optical transceivers; Brocade copper Twinax cables of one, three, or five meters</p>
Chassis bandwidth	<p>Brocade DCX: 3.072 Tbit/sec per chassis (384 ports × 8 Gbit/sec data rate)</p> <p>Brocade DCX-4S: 1.536 Tbit/sec per chassis (192 ports × 8 Gbit/sec data rate)</p>	USB	1 USB port per control processor for firmware download, support save, and configuration upload/download
Slot bandwidth	256 Gbit/sec (data rate)	Fabric services	Advanced Performance Monitoring (including Top Talkers); Adaptive Networking (Ingress Rate Limiting, Traffic Isolation, QoS); BB credit recovery; Bottleneck Detection; Brocade Advanced Zoning (default zoning, port/WWN zoning, broadcast zoning); Dynamic Path Selection (DPS); Extended Fabrics; Fabric Watch; FDMI; Frame Redirection; FSPF; Integrated Routing; IPOFC; ISL Trunking; Management Server; N_Port Trunking; NPIV; NTP v3; Port Fencing; Registered State Change Notification (RSCN); Reliable Commit Service (RCS); Simple Name Server (SNS); Virtual Fabrics (Logical Switch, Logical Fabric)
Local switching bandwidth	<p>128 Gbit/sec for FC8-16: 16 ports × 8 Gbit/sec (data rate)</p> <p>256 Gbit/sec for FC8-32: 32 ports × 8 Gbit/sec (data rate)</p> <p>384 Gbit/sec for FC8-48: 48 ports × 8 Gbit/sec (data rate)</p>	Extension	Supports DWDM, CWDM, and FC-SONET devices; FCIP, data compression, Fast Write, Tape Write and Read Pipelining, QoS, BB credit recovery
ICL bandwidth	<p>Brocade DCX: 512 Gbit/sec; 4 ICLs × 16 8Gb Fibre Channel connections</p> <p>Brocade DCX-4S: 256 Gbit/sec; 4 ICLs × 8 8Gb Fibre Channel connections</p> <p>Both models: ICL bandwidth is load-balanced using eight 8-port frame-based trunks and DPS</p>	FICON	FICON, FICON cascading (FOS: Brocade DCX, DCX-4S; and M-EOS: Brocade DCX only), FICON CUP; Brocade Accelerator for FICON (FICON XRC emulation and read/write Tape Pipelining)
High Availability			
Architecture	Passive backplane; separate and redundant control processor and core switching blades (two of each); redundant WWN cards	Chassis power	Two 2000 W AC power supply modules (100 to 240 V auto-sensing), 2N redundancy; Brocade DCX supports two additional power modules
Cooling	<p>Brocade DCX: Three blower assembly modules (two required for operation)</p> <p>Brocade DCX-4S: Two blower assembly modules (one required for operation)</p>		

BROCADE DCX BACKBONE SPECIFICATIONS (CONTINUED)

Solution availability	Designed to provide 99.999 percent uptime capabilities; hot-pluggable redundant power supplies, fans, WWN cards, processors, core switching, port blades, and optics; online diagnostics; non-disruptive firmware download and activation
-----------------------	---

Management

Management	HTTP, SNMP v1/v3 (FE MIB, FC Management MIB), Telnet; Auditing, Syslog; Brocade Advanced Web Tools, Brocade Fabric Watch; Brocade Data Center Fabric Manager (DCFM) Enterprise (Brocade DCX, DCX-4S) or DCFM Professional/Professional Plus (Brocade DCX-4S only), Brocade Fabric Manager (optional, FOS environments only), Brocade EFCM 9.x (optional), command line interface; SMI-S compliant; Administrative Domains; trial licenses for add-on capabilities
------------	---

Security	DH-CHAP (between switches and end devices), FIPS 140-2 L2-compliant, HTTPS, IPsec, IP filtering, LDAP, Port Binding, RADIUS, Role-Based Access Control (RBAC), Secure Copy (SCP), Secure RPC, SSH v2, SSL, Switch Binding, Trusted Switch
----------	---

Management access	10/100/1000 Ethernet (RJ-45) per control processor, in-band over Fibre Channel; serial port (RJ-45) and one USB per control processor module; call-home integration enabled through Brocade DCFM, EFCM, and Fabric Manager
-------------------	--

Diagnostics	POST and embedded online/offline diagnostics, including RAstrace logging, environmental monitoring, non-disruptive daemon restart, FCping and Pathinfo (FC traceroute), port mirroring (SPAN port)
-------------	--

Mechanical Specifications

Enclosure	Rear panel-to-door airflow; Brocade DCX-4S ships with 1U exhaust shelf
-----------	--

Mounting	Rack-mountable in a standard 19-inch EIA cabinet
----------	--

Size	<u>Brocade DCX</u> Width: 43.74 cm (17.22 in) Height: 61.24 cm (24.11 in, 14U) Depth (without door): 61.19 cm (24.09 in) Depth (with door): 73.20 cm (28.82 in) <u>Brocade DCX-4S</u> Width: 43.74 cm (17.22 in) Height: 35.00 cm (13.78 in, 8U) plus 4.37 cm exhaust shelf (1.72 in, 1U) Depth without door: 61.19 cm (24.09 in) Depth with door: 73.20 cm (28.82 in)
------	---

System weight	<u>Brocade DCX</u> 103.50 kg (228.20 lb) for 384-port configuration fully populated; 39.55 kg (82.20 lb) for chassis <u>Brocade DCX-4S</u> 68.04 kg (150.00 lb) for 192-port configuration fully populated; 25.76 kg (56.80 lb) for chassis
---------------	--

Environment

Temperature	Operating: 0° C to 40° C (32° F to 104° F) Non-operating: -25° C to 70° C (-13° F to 158° F)
-------------	---

Humidity	Operating: 20% to 85% RH non-condensing at 40° C (104° F) Non-operating and storage (non-condensing): 10% to 93% at 70° C (158° F)
----------	---

Altitude	Up to 3000 meters (9842 feet)
----------	-------------------------------

Shock	Operating: 20 g, 6 ms, half sine Non-operating: 33 g, 11 ms, half sine
-------	---

Vibration	Operating: 0.5 g p-p, 5 to 500 to 5 Hz Non-operating: 2.0 g p-p, 5 to 500 to 5 Hz
-----------	--

Heat dissipation	<u>Brocade DCX</u> Min: 16-port configuration of 505 W, 1722 BTU/hr Max: 384-port configuration of 1337 W, 4564 BTU/hr <u>Brocade DCX-4S</u> Min: 16-port configuration of 363 W, 1239 BTU/hr Max: 192-port configuration of 753 W, 2570 BTU/hr
------------------	--

CO ₂ emissions	<u>Brocade DCX</u> 4.9 metric tonnes per year (with 384 ports at 0.42 kg/kWh) 1.6 kg per Gbit/sec per year <u>Brocade DCX-4S</u> 2.8 metric tonnes per year (with 192 ports at 0.42 kg/kWh) 1.8 kg per Gbit/sec per year
---------------------------	---

Power

Supported power range	<u>Voltage</u> Range: 85 to 264 VAC Auto-volt Nominal: 100 to 240 VAC <u>Power</u> 85 to 132 VAC: 1000 W 180 to 264 VAC: 2000 W
-----------------------	--

In-rush current	20 Amps maximum, peak
-----------------	-----------------------

Frequency	47 to 63 Hz
-----------	-------------

For information about supported SAN standards, visit www.brocade.com/sanstandards

For information about switch and device interoperability, visit www.brocade.com/interoperability

For information about hardware regulatory compliance, visit www.brocade.com/regulatorycompliance

Corporate Headquarters

San Jose, CA USA
T: +1-408-333-8000
info@brocade.com

European Headquarters

Geneva, Switzerland
T: +41-22-799-56-40
emea-info@brocade.com

Asia Pacific Headquarters

Singapore
T: +65-6538-4700
apac-info@brocade.com

© 2009 Brocade Communications Systems, Inc. All Rights Reserved. 09/09 GA-DS-961-08

Brocade, the B-wing symbol, BigIron, DCX, Fabric OS, FastIron, IronPoint, IronShield, IronView, IronWare, JetCore, NetIron, SecureIron, ServerIron, StorageX, and Turbolron are registered trademarks, and DCFM, Extraordinary Networks, and SAN Health are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. All other brands, products, or service names are or may be trademarks or service marks of, and are used to identify, products or services of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.



BROCADE